

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen



PCT/ SE 00 / 0 1 8 7 7

10/089112

a / Priority Doc.  
E. Ullis  
10-7-02

REC'D 05 DEC 2000

PAPO

PCT

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan. 4

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande                      Queyton Systems AB, Hägersten SE  
Applicant (s)

(21) Patentansökningsnummer    9903521-4  
Patent application number

(86) Ingivningsdatum                      1999-09-27  
Date of filing

Stockholm, 2000-11-28

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Anita Södervall

Avgift  
Fee

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN**

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

Ink. t. Patent- och reg.verket

1999 2 7

1

Huvudfaxen Kassar

## TECHNICAL FIELD

The present invention relates to an add/drop node of an optical WDM-network, in particular to the connection of an add/drop node to two paths of the network carrying light in opposite directions.

## BACKGROUND

Optical networks using WDM (Wavelength Division Multiplexing) are now proposed to be built more and more. In such networks a plurality of add/drop nodes are connected and simple devices should be provided for connecting the nodes to the network. For example, when extending an existing node is expanded to be capable of receiving and transmitting in another wavelength band the work which is required therefor should be minimized.

## SUMMARY OF THE INVENTION

It is an object of the invention to provide an add/drop node for an optical WDM-network having a simple way of connecting the node to circulating fiber paths of the network.

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described by way of a non-limiting embodiment with reference to the accompanying drawings, in which

Fig. 1 is a block diagram of an optical network having a ring architecture and a hub node and four client nodes,

Fig. 2 is a schematic picture of the connection lines of an add/drop module used in the nodes of the network,

Fig. 3 is a view from the side of the inside of a house of an add/drop module,

Fig. 4 is a front view of a plurality of add/drop modules mounted in a rack,

Fig. 5 is a block diagram schematically showing the connections of add/drop modules of the nodes,

Fig. 6 is a block diagram showing in a somewhat more realistic way the connections of add/drop modules of the nodes, and

Fig. 7 is a perspective view showing the inside of a house of an add/drop module.

## DETAILED DESCRIPTION

In Fig. 1 a block diagram of an optical fiber WDM-network having a ring configuration is shown. Thus two optical fiber paths 1e, 1w pass in a basically uninterrupted way all around the network, one fiber path 1e carrying light propagating in the east direction and the other fiber path 1w carrying light propagating in the west direction.

The network includes a hub node 2 and in the embodiment shown four client nodes 3, called Client 1, 2, 3 and 4, the nodes being connected to the two basic fiber paths 1e, 1w for adding and dropping light from the fibers. A client node n receives and transmits information in a narrow wavelength band, also called channel, around a single

Ink. t. Patent- och req.verket

1999 -09- 2 7

Huvudfaxen K<sup>2</sup>assan

wavelength  $\lambda_n$ ,  $n = 1, 2, \dots$ . The hub node 2 can receive and transmit information in all channels, i.e. on all wavelengths  $\lambda_n$ ,  $n = 1, 2, \dots$ . For each client node 3, the hub node 2 is connected to an electrical client portion 5. Such an electrical client portion 5 comprises a transmitter 7 converting electrical signals to optical signals and a receiver 9 for optical signals converting the optical signals to electrical signals. The electrical client portion 5 is through optical fibers connected to an optical client portion 11 in the hub node 2. The optical client portion 11 has optical connectors for receiving the optical fibers extending from the respective electrical client portion.

The optical client portion 11 comprises an optical receiver-transmitter combination 13, 15 for transmission, the receiver 13 of the combination receiving the light signal from the transmitter 7 of the electrical client portion 5 providing its output signal to the transmitter 15 of the pair, which provides a well-defined light signal in the narrow wavelength band used for the respective client. The optical transmitter 15 is coupled to an optical connector for providing its output signal on an optical fiber to add/drop modules as will be described hereinafter.

The optical client portion 11 also comprises an optical receiver-transmitter combination for receiving, the combination comprising two optical receivers 17e, 17w connected to receive light from the add/drop modules through optical fibers and optical connectors, one receiver 17e being used for receiving light propagating in the network, in the appropriate fiber, in an east direction and another receiver 17w being used for receiving light propagating in the west direction in the ring network. The outputs of the two optical receivers 17e, 17w are connected to inputs of a combining element 19 which combines the received signals to provide them to a transmitter 21, the output terminal of which is through the respective connector and a fiber length connected to the receiver 9 in the electrical client portion 5.

Furthermore, the hub node 2 includes a plurality of add/drop modules 23l, 23r, one pair of such add/drop modules being provided for each client node 3 in the network. In such a pair one module 23l is adapted to transmit in a left direction from the hub node and to receive from the same left direction. The other module 23r of a pair is adapted to transmit in and to receive from the right direction from the hub node. Each add/drop module is connected in the two ring-shaped fiber paths 1e, 1w of the network. A left add/drop module 23l comprises one add device 25l connected in the fiber ring path 1w and one drop device 27l connected in the other fiber ring path 1e. The add device 25l is through fiber pieces, a 50/50 splitting coupler 29 and the respective connector connected to the transmitter 15 in the optical client portion 11 for the appropriate client node. The drop device 27l is through a fiber and the respective connector connected to the receiver 17e in the optical client portion 11 for the same client node.

In the same way, the right add/drop module 23r in the pair comprises one add device 25r connected in the fiber ring path 1e and one drop device 27r connected in the

Ink. t. Patent- och reg.verket

1999-09-27

3

Huvudfaxen Kassan

other fiber ring path 1w. The add device 25r is through fiber pieces, the splitting coupler 29 and the respective connector connected to the transmitter 15 in the optical client portion 11 for the client node. The drop device 27r is through a fiber and the respective connector connected to the receiver 17w in the optical client portion 11 for the client  
5 node.

The add devices 25l, 25r contain some coupling or combining element and if required a notch filter blocking light of the wavelength band or channel for which the add/drop module is designed. The optional filter will then stop only light of said wavelength band before light of the same wavelength band is added in the combining  
10 element. The drop devices 27l, 27r contain in the same way some splitting and filtering element for tapping off only light of the wavelength band or channel for which the add/drop module is designed.

It appears that all add/drop nodes 23l, 23r have the same basic design and functions and can thus all be given the same physical shape as will be discussed hereinafter.

15 The two fiber ring paths 1e, 1w are connected to the hub node 2 on a left side of the hub node and on a right side of the node. At each such side a monitor module 31l, 31r can be arranged which is thus connected in the two ring paths. A monitor module 31l, 31r comprises an add coupler 33l, 33r for adding e.g. some control signal and a tap 35l, 35r for tapping off some small portion of the incoming light power, e.g. 1%.

20 The schematic diagram of Fig. 2 illustrates the functions of an add/drop module 21l, 21r. The module comprises a house indicated at 41. Light from one 1e of two ring paths of the network enters the module at a connector 43 attached to a fiber piece 45 extending loosely outside the house 41. The fiber piece 45 has a thick protective sleeve and is inside the house at 47 welded to an end of an optical fiber 49 having a standard  
25 thin protective sleeve. The optical fiber piece 49 is at its opposite end connected to one of the two inputs of the add device 23l, 23r. The output of the add device is connected to a fiber piece 51, which in turn is connected to a connector 53 attached to the house 41. The connector 53 should be connected in the same ring path 1e as the input connector 43. The other input of the add device is through a fiber piece 55 connected a connector 57  
30 attached to the house 41. The connector 43 thus receives light from the ring path 1e to make it continue to the fiber 45, through the weld 47, the fiber piece 55, the add device 23l, 23h, the fiber piece 51 to the connector 53. The output connector 53 lets the light continue along the ring path 1e. Light from an optical client portion 11 enters the module at the connector 57, continues through the fiber to the add device, in which the light is  
35 added to that propagating along the ring path 1e.

Furthermore, in the module there is a set of connected fiber pieces, which is parallel to that described and is connected in the other ring path 1w of the network but in which instead of the add device 23r, 23l the drop device 25l, 25r is connected. Thus a connector 63 is to be connected to the ring path and is attached to an end of a well

Ink. t. Patent- och reg.verket

1999 -09- 2

4

Huvudfaxen Kassan

protected fiber piece 65 extending partly outside the house 41, the other being connected through a weld 67 to a standard fiber piece 69. This fiber piece is in turn connected to one of the two outputs of the drop device 25l, 25r. The input of the drop device is connected to fiber piece 71 which receives light from a connector 73 attached to the house 41. The connector 73 should be connected in the respective ring path 1w. The other output of the drop device is connected to an end of a fiber piece 75 which has its other end connected to connector 77 attached to the house 41. This connector is through a fiber attached to a respective receiver 17w (17e) in the optical client portion 11. Light from the ring path 1w enters the module at the connector 73, continues through the fiber 71, the drop device 35r, 35l, the fiber 69, the weld 67, the thick fiber 65 to the loose connector 63, which in turn is connected in the respective ring path 1w of the network. Some light of a specific wavelength band is tapped off in the drop device and continues through the fiber 75 to the connector 77 and therefrom to the optical client portion.

The physical layout of the interior of an add/drop module house 41 is shown in Fig. 3. The module house 41 comprises a substantially flat portion from which various walls stand out. The walls all have the same height and connect to a basically flat lid, not shown, which is mounted over the house 41. The walls form two circular winding cores 81 having a sufficiently large diameter, e.g. about 50 mm, allowing that fibers can be wound around them and not being subjected to too small bending radii (too large curvatures). The two winding cores are placed at some distance of each other allowing that fibers can pass therebetween. By arranging two such cores the fiber pieces used can be allowed to have some length allowing them to be comfortably handled and to again be spliced to the devices in the case of fiber breaks or bad splices and also, the direction of the fiber pieces at the places where they are connected to the devices can be selected to be the proper one not using too small bends, by placing the fibers for instance in a configuration similar to the figure eight around the two cores. Inside the walls forming the winding cores through-holes 83 may be arranged for an easy handling of the module. The add devices 23l, 23r and the drop devices 25l, 25r can be attached between outstanding walls 85 at the top of the house.

At the lower edge of the house devices are provided for attaching the house to a rack, the attaching devices comprising a notch 87 at the rear side and a snap device 89 at the front side. A channel 91 is formed at the front top side to allow fibers connecting the module to the associated optical client portion to be held therein.

Fig. 4 is a front view of the add/drop modules and the monitor modules mounted in a rack, the loosely extending fiber pieces 45, 65 not being visible in this figure. By comparing Fig. 4 to Fig. 1 it is seen that the connection of all left add/drop modules is as indicated in Fig. 3, the extending fiber pieces 45, being inserted in the mating connectors 53, 73 in the adjacent module at the left side. This connection is illustrated in the schematic view of Fig. 6, see also Fig. 5. Thus, in Fig. 5 the same basic connection as

Ink. t. Patent- och reg.verket

5

1999-09-27

Huvudförf. K. Sjöström

in Fig. 1 is illustrated, where, in the right modules 21r the add and drop devices have changed places with each other. Then a cross coupling must be made between the group of left modules 21l and the group of right modules 21r and between the right group and the right monitor module 31r as compared to the straight schematic connection of modules shown in Fig. 1. The same connection of the modules is illustrated in Fig. 6 in which the connections between the add/drop modules using loosely extending fiber pieces is shown. From this figure it appears clearly that all add/drop modules can have an identical construction, only the tapping-off devices and filters being special to the channel for which the respective module is designed. The cross coupling in the middle of the assembly of add/drop modules, between the left and right modules. Such a cross connection can be made by connecting the loose fiber pieces 101 having optical connectors at each end in a cross configuration or a particular cross connecting module can be used. Such a module has the same exterior design as the other modules but has inside just the optical fibers connected cross-wise. In Fig. 4 a multitude of add/drop modules 21l, 23r are illustrated. However, only a portion of the add/drop modules may be active ones, constructed as described above. At the side of the active modules dummy modules are inserted having the same exterior layout but without the connectors and the loosely extending fibers. The dummy modules are used for just filling up the space between the active modules and the monitor modules.

The two monitor modules both have the same exterior connectors and interior devices as each other but have not the same interior connection lines. The necessary connections appear clearly from Fig. 1.

The client nodes 3 have the same basic design as the hub node 2 but are designed to receive and transmit in only one wavelength band. The same kind of add/drop modules as described above can for example be used.

In other network ring architectures the client nodes can receive and transmit in more than one wavelength band. Then the client nodes can have the same structure as the hub node 2.

Ink. t. Pat. och reg.verket

1999-09-27

6

Huvudfaxen Kassan

## CLAIMS

1. An add/drop node of an optical WDM-network, the network including two fiber paths for letting light of a plurality of channels propagate in opposite direction around the network, **characterized by** two add/drop modules for each of the channels, each  
5 add/drop module comprising an add device for adding light to a first one of the paths and a drop device for deflecting a portion of light from a second one of the paths and all add/drop modules having the same construction.

2. An add/drop node according to claim 1, **characterized in** that an add/drop module comprises a house enclosing the add device and the drop device, a first fixed  
10 connector attached to the house for connection in the first path and a first optical fiber extending freely from the house and having a first free connector at its free end to be attached to the fixed connector of a neighbouring add/drop module for continuing the first path through the considered add/drop module to the neighbouring module, and a second  
15 fixed connector attached to the house for connection in the second path and a second optical fiber extending freely from the house and having a second free connector at its free end to be attached to the fixed second connector of a neighbouring add/drop module for continuing the second path through the considered add/drop module to the neighbouring module.

3. An add/drop node according to claim 2, **characterized in** that the house includes  
20 two winding cores around which excessive fiber lengths connecting devices and connectors of the add/drop module can be wound.

Ink. t. Patent- och reg.verket

1999 -09- 2 7

7

Huvudfaxen Kassan

## ABSTRACT

An add/drop node of an optical WDM-network which has two fiber paths for light of a plurality of channels propagating in opposite directions comprises two add/drop modules (23l, 23r) for each of the channels. All the modules are identically constructed.

5 Each module comprises an add device (25l, 25r) for adding light to one of the paths and a drop device (27r, 27l) for deflecting a portion of light from a second one of the paths. A module comprises a house (41) enclosing the add device and the drop device. A first fixed connector (53, 73) is attached to the house for connection in the first path and to a

10 an optical fiber (45, 65) which extends freely from the house and has a first free connector (43, 63) at its free end to be attached to the fixed connector of a neighbouring add/drop module for continuing the first path through the considered add/drop module to the neighbouring module. In the same way a second fixed connector is attached to the house for connection in the second path and to a second optical fiber which extends freely

15 second connector of a neighbouring add/drop module for continuing the second path through the considered add/drop module to the neighbouring module.

(Fig. 3)



Ink. t. Patent- och reg.verket

1999-09-27

Huvudfaxen Kassan

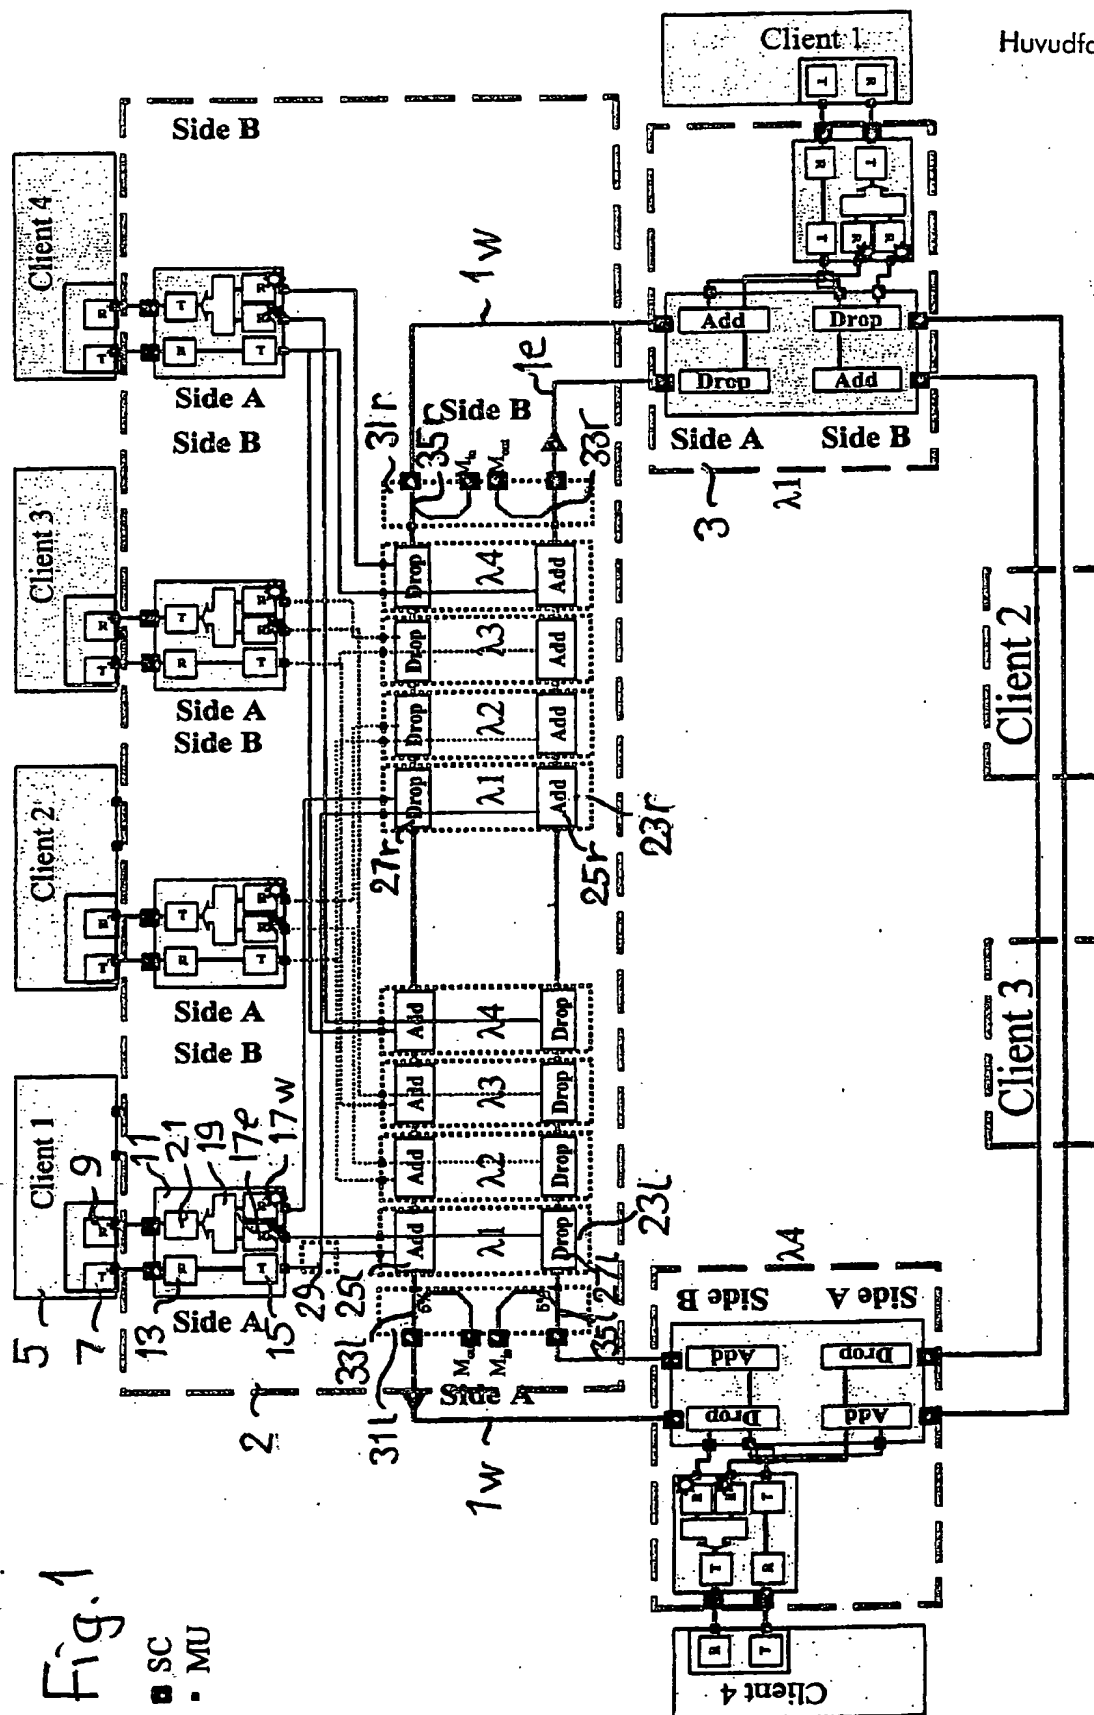


Fig. 1

■ SC  
• MU



t. Patent- och reg.verket

1999 -09- 2 7

Huvudfaxen Kassan

Fig. 3

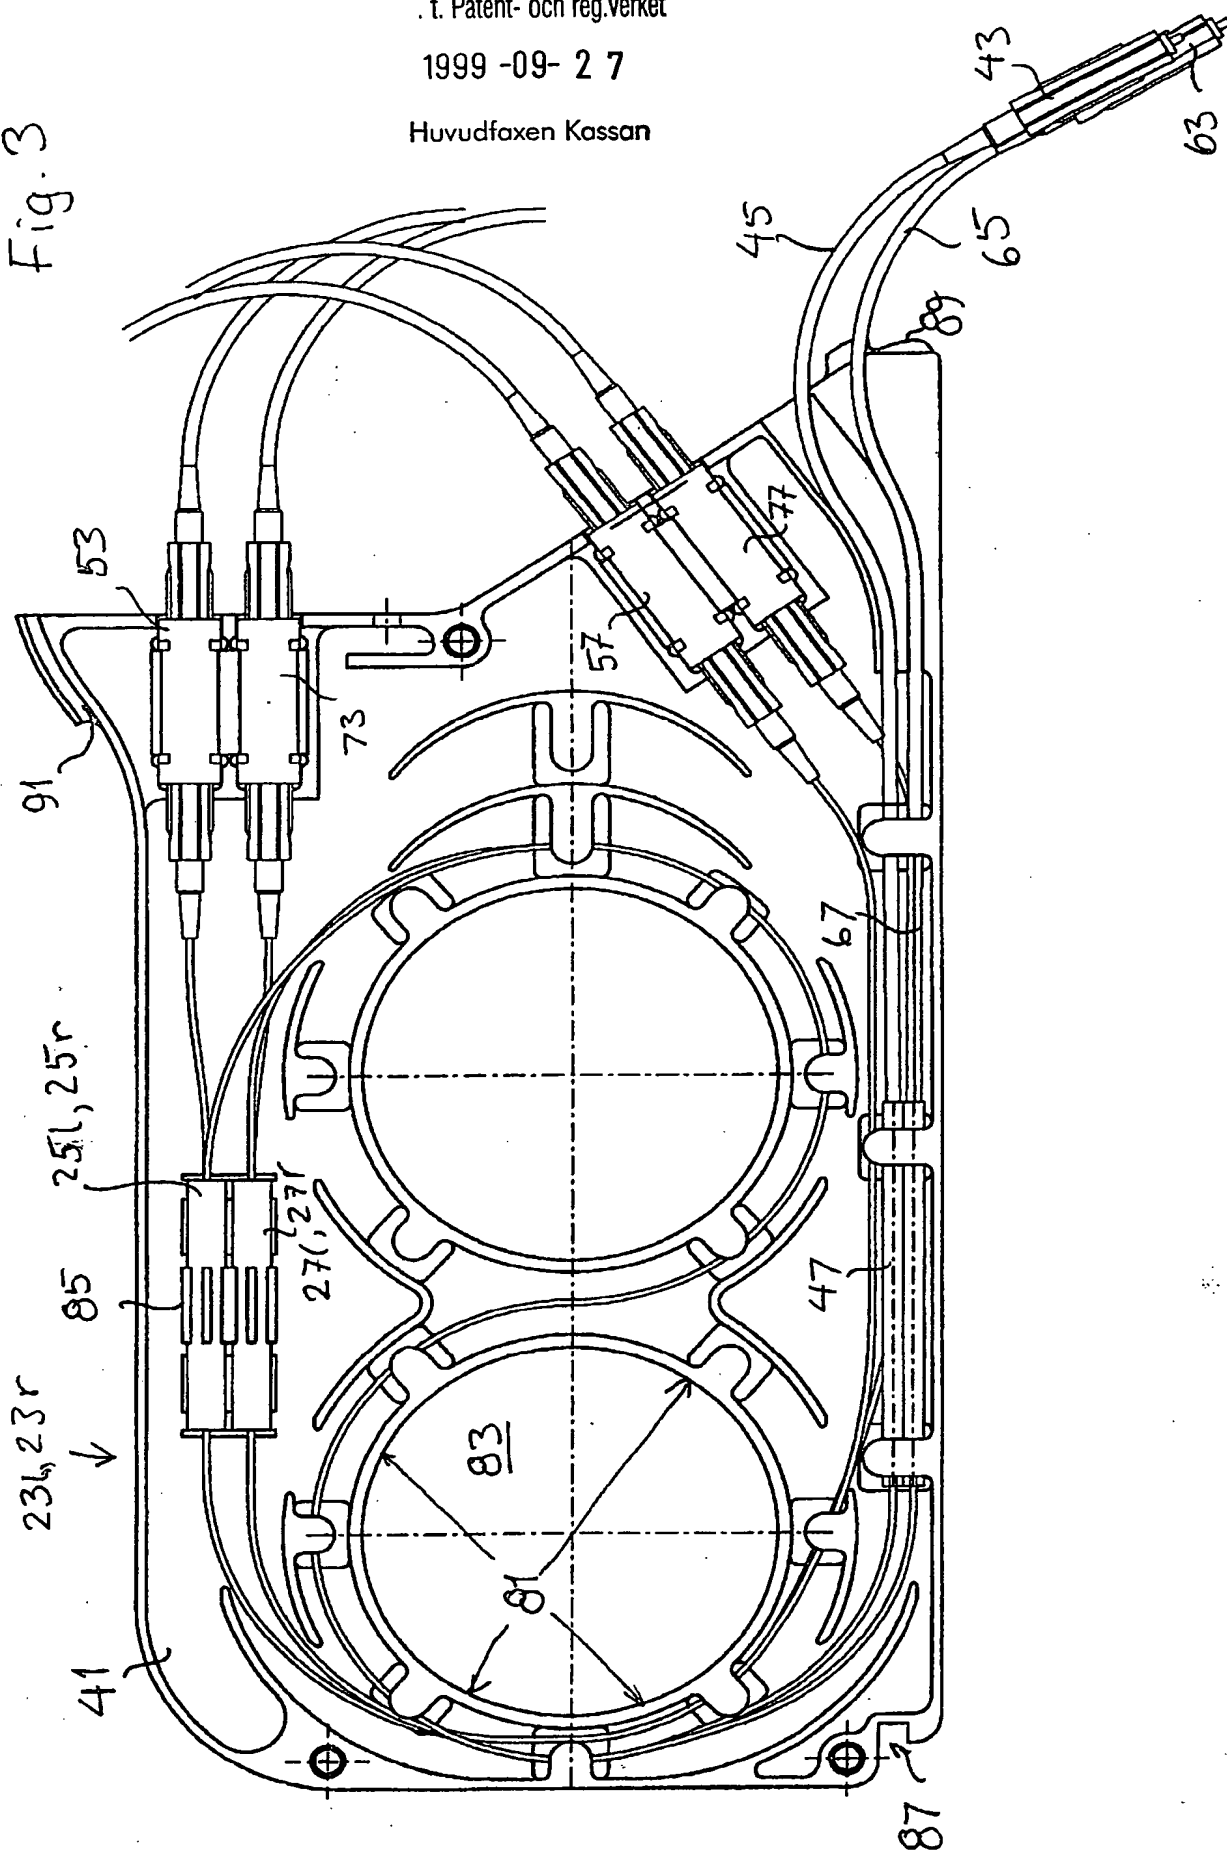


Fig. 5


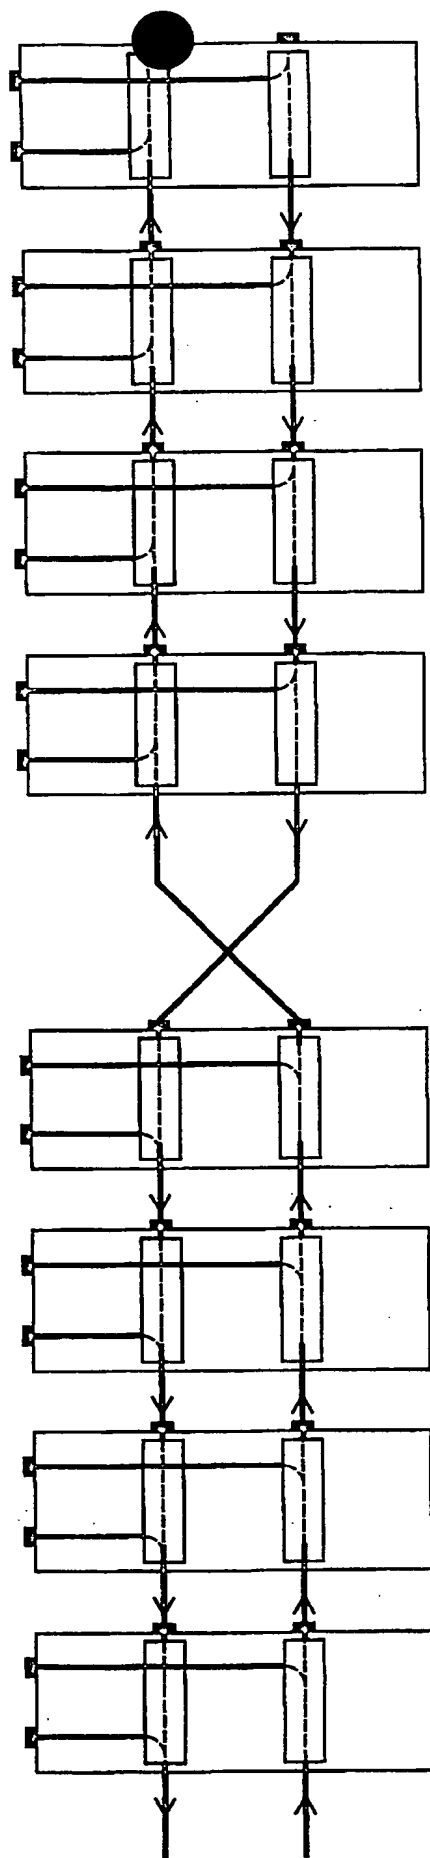


Fig. 6

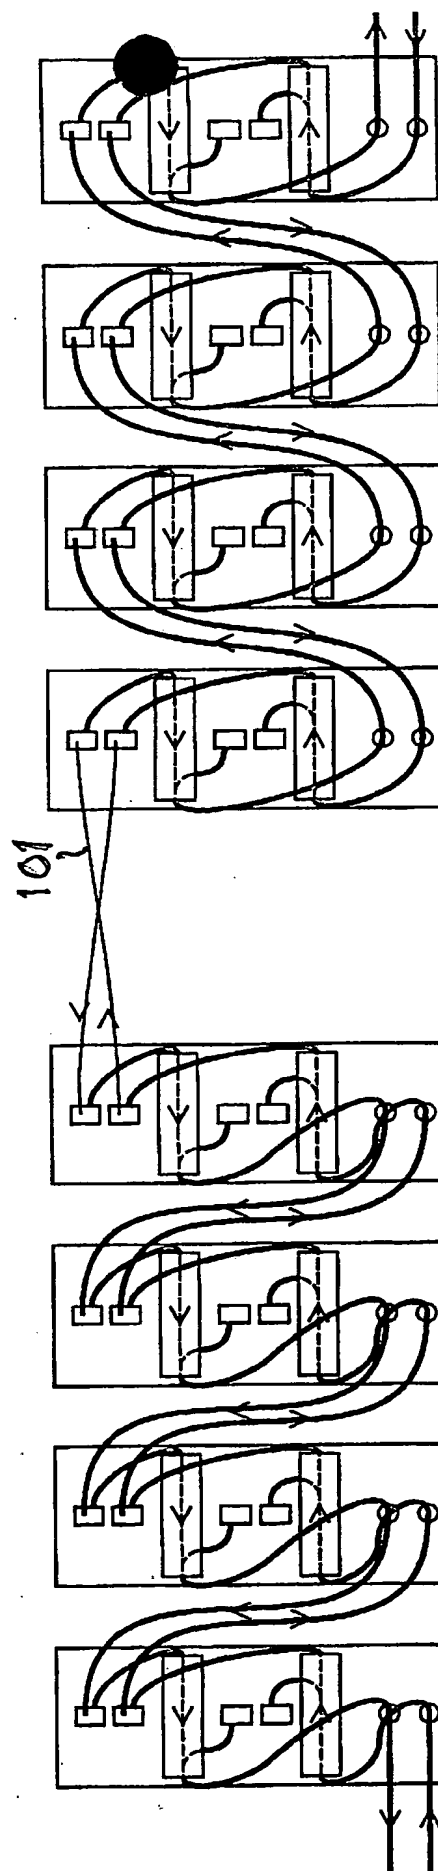

Ink. t. Patent- och reg.verket

1999 -09- 2 7


Huvudfaxen Kassar

Ink. t. Patent- och reg.verket

1999 -09- 2 7

Huvudfaxen Kassan

Fig. 7

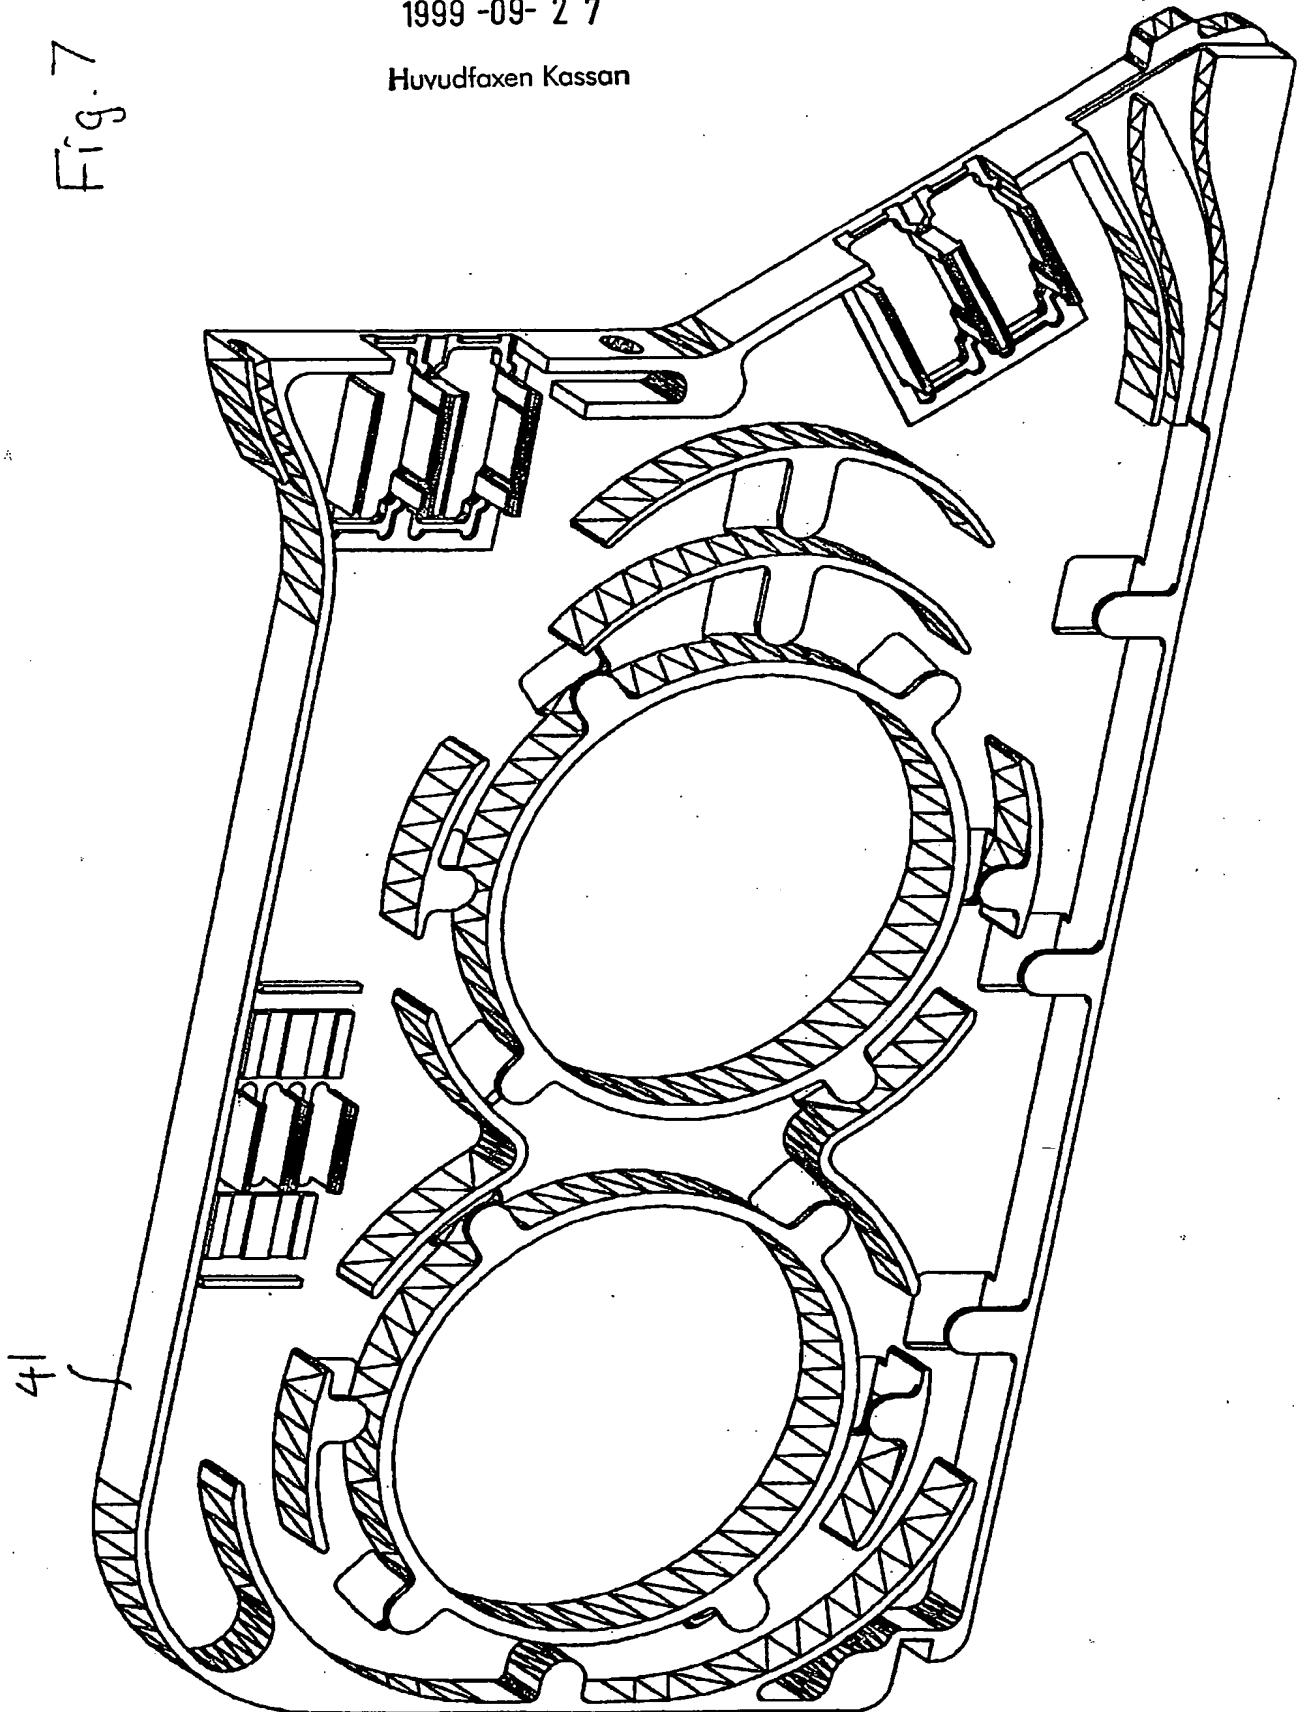

**THIS PAGE BLANK (USPTO)**